

Installation Instructions

Half Cone with Sweep Sconce 20-6563

B80

Page 1 of 1

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Please Note: This fixture is designed to be mounted on a standard wall surface and may not be suitable for all applications. If installing in a non-wood frame application, we recommend consulting a qualified builder or electrician.


To Mount Fixture to Wall and Install Glass (Figure 1)

Component Parts

- A Glass
- B Thumb Screw (2)
- C Crossbar
- D Ground Screw
- E Fixture Assembly
- F Forged Front Piece
- G #8 Screws

Caution: Be sure power is off at the main breaker box prior to installation.

1. Carefully unpack the fixture from the carton.
2. Using two machine screws (not provided), fasten the crossbar (C) to the electric box making sure that fixture mounting holes are level.
Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.
3. Hold the fixture assembly (E) close to the wall and using suitable wire connectors, not provided, connect fixture wires to supply (white to white or ribbed and black to black or smooth). Run a pigtail lead from crossbar ground screw (D) to the junction box and connect all ground wires (bare copper or green to bare copper or green). **Caution:** Make sure wire connectors are twisted on securely, and no bare wire is exposed.
4. Carefully tuck all wires behind the fixture, place fixture firmly against the wall and fasten with two #8 screws (G).
5. Install light bulb(s). *Not Included*
6. Slide glass (A) downward into fixture and adjust so it is flush against the high point on the curve of the fixture (E).
7. Level and adjust the glass (A) so there is approx. 1/4" between it and the wall on all sides.
8. Snug the thumb screws (B) against the inside face of glass (A). Do not over tighten.
9. Restore electricity at main breaker.

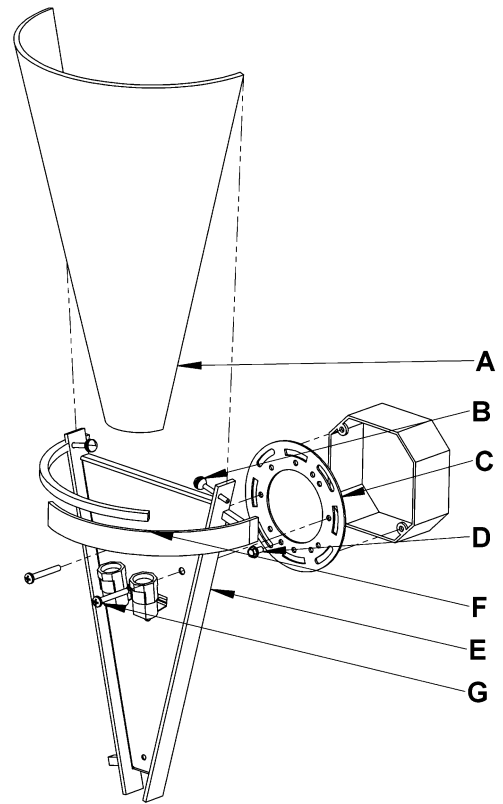

(Figure 1)

This illustration represents a typical fixture and may not match every style.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

* Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.